



## The Value Of Clean Water: Why Indian Food Factories Should Stop Wasting Water

Shivam Khamari<sup>1</sup>, Dr. Jakki Samir Khan<sup>2</sup>, Prof. Dr. Ramesh Chandra Rath<sup>3</sup>, Dr. Arpan Mahapatra<sup>4</sup>, Dr. Rajani Agrawalla<sup>5</sup>

<sup>1</sup> Assistant Professor, Swami Vivekananda Institute of Management, Baniatangi, Khodha  
Email- shivamkh20@gmail.com ORCID: 0009-0009-3618-2954

<sup>2</sup> Assistant Professor, Srusti Academy of Management and Technology, Bhubaneswar,  
Email- jakikhan18@gmail.com ORCID: 0009-0002-9410-6457

<sup>3</sup> Professor and Principal, Swami Vivekananda Institute of Management, Baniatangi, Khordha  
Email- drramesh.rrc@gmail.com

<sup>4</sup> Assistant Professor, Srusti Academy of Management and Technology, Bhubaneswar,  
Email- arpanmahapatra@gmail.com ORCID: 0000-0003-4487-3607

<sup>5</sup> Assistant Professor, School of Management, Centurion University of Technology and Management, Odisha, India. E-mail- rajaniagrawalla220@gmail.com, ORCID- 0009-0005-4746-6953

### ABSTRACT

India currently sustains approximately 18% of the global population using a disproportionately minimal 4% of the world's freshwater resources. While historical discourse predominantly focuses on the agricultural sector—accounting for 90% of national freshwater withdrawals—the rapidly expanding food and beverage processing industry exerts massive, escalating pressure on water quantity and ecological quality. Food processing facilities utilize immense volumes of pristine "blue water" for thermal regulation and product formulation, subsequently discharging heavily contaminated "grey water" effluents. This exhaustive research synthesizes comprehensive secondary data, governmental regulatory frameworks, and peer-reviewed literature (2020–2025). Employing the ISO 14046 standard for water footprint assessment, Central Pollution Control Board (CPCB) and Central Ground Water Authority (CGWA) guidelines, and multiple Water Quality Indices (WQI), the study evaluates industrial basin impacts and the efficacy of water audits and Zero Liquid Discharge (ZLD) systems. Findings demonstrate critical operational inefficiencies; for example, processing one kilogram of chicken meat requires up to 4,300 litres of water, while dairy operations consume roughly 1,078 litres per kilogram of milk. Untreated industrial effluents heavily degrade surface water bodies, evidenced by the Brahmani River in Odisha, where toxic heavy metal contamination ( $Pb^2 + Cu^2 + Zn^2$ ) frequently exceeds national safety thresholds, rendering 80% of sampled water unfit for consumption. Conversely, facilities utilizing comprehensive 4R (Reduce, Reuse, Recycle, Recover) water audits report freshwater consumption reductions of 25% to 45%. The inevitable transition from linear water consumption paradigms to circular water management is imperative for the survival of the Indian food processing sector. Enforcing rigorous CPCB standards, closing CGWA regulatory exemptions for micro-enterprises, and expanding ZLD infrastructure are essential steps to align rapid industrial expansion with strict ecological limitations, guaranteeing long-term water, food, and economic security.

**Keywords:** Sustainable agriculture, Zero Liquid Discharge, Industrial effluent, Water footprint assessment, Food processing, Circular economy, Central Pollution Control Board.

### Introduction

**1.1 The Escalating Global and Indian Water Crisis:** Water availability has emerged as one of the most pressing socio-economic challenges of the 21st century. The UN Sustainable Development Goal (SDG) 6 mandates sustainable water management for all by 2030, a challenging target as global water withdrawal is projected to increase by 53% by 2030. India is positioned at the critical nexus of this crisis. Supporting nearly 18% of the global population with only 4% of the world's freshwater resources, India's water scarcity has transitioned from a seasonal inconvenience to a systemic national threat. The nation consumes the largest volume of groundwater globally, extracting it at rates far exceeding natural aquifer recharge. Furthermore, shifting monsoon patterns have exacerbated the crisis, minimised recharge and maximizing destructive surface runoff.

**1.2 Shifting Demographics and the Water Footprint:** As India urbanizes, dietary preferences are shifting toward water-intensive proteins, refined sugars, and fats. Producing a single person's daily food intake requires 2,000 to 5,000 litres of water. This pressure is quantified using the Water Footprint Assessment (WFA), which categorizes consumption into blue (surface/groundwater), green (rainwater), and grey (water required to assimilate pollution) footprints. Urban Indian diets exhibit a significantly higher blue water footprint than rural diets, correlating higher living standards with amplified blue water consumption.


**1.2 The Expanding Role of the Food Processing Industry:** While agriculture accounts for over 90% of national freshwater withdrawals, the food processing industry exerts massive, highly concentrated stress on local aquifers. Food factories require vast volumes of high-purity blue water for thermal regulation, product formulation, and rigorous Cleaning-In-Place (CIP) sanitation protocols. Beyond extraction, these facilities generate a substantial grey water footprint. Wastewater from dairies, abattoirs, and beverage plants contains extremely high concentrations of organic matter, chemical cleaning agents, and suspended solids. Discharging this effluent without comprehensive treatment aggressively degrades aquatic ecosystems and contaminates downstream agricultural and municipal water supplies.

**1.3 Critical Review of Literature and Identified Gaps:** Recent scholarly literature (2020–2025) successfully models macro-level volumetric footprints of major crop systems, illustrating broad agricultural impacts. Conversely, environmental engineering studies frequently detail micro-level wastewater treatment technologies, such as advanced adsorption techniques. However, a pronounced gap remains in research synthesizing these technological interventions with corporate policy and governmental compliance within the Indian socio-economic context. Existing literature often fails to actively bridge the identification of volumetric consumption (via water audits) with the elimination of the effluent footprint (via Zero Liquid Discharge technologies) in a comprehensive circular economy framework.

### 1.5 Research Objectives:

Addressing these critical gaps, this comprehensive report aims to systematically deconstruct the water management practices within Indian food factories, highlighting the absolute ecological and economic necessity of transitioning toward circular water economies. The specific objectives of this study are:

1. To meticulously quantify the direct blue water consumption and establish baseline water footprints for major Indian food processing sub-sectors, specifically focusing on the highly intensive dairy, meat, and beverage industries.
2. To assess the severe environmental degradation caused by poorly managed industrial effluents, utilizing robust empirical data and multiple Water Quality Indices (WQI) from the Brahmani River basin in Odisha as a primary case study.
3. To rigorously evaluate the efficacy and enforcement of existing regulatory frameworks, including the Central Pollution Control Board (CPCB) effluent discharge standards and the Central Ground Water Authority (CGWA) groundwater extraction guidelines.
4. To critically analyze the technological viability, economic payback periods, and systemic implications of modern interventions—specifically the implementation of ISO 14046 compliant Water Audits and advanced Zero Liquid Discharge (ZLD) systems—in fostering a sustainable Indian food processing landscape.

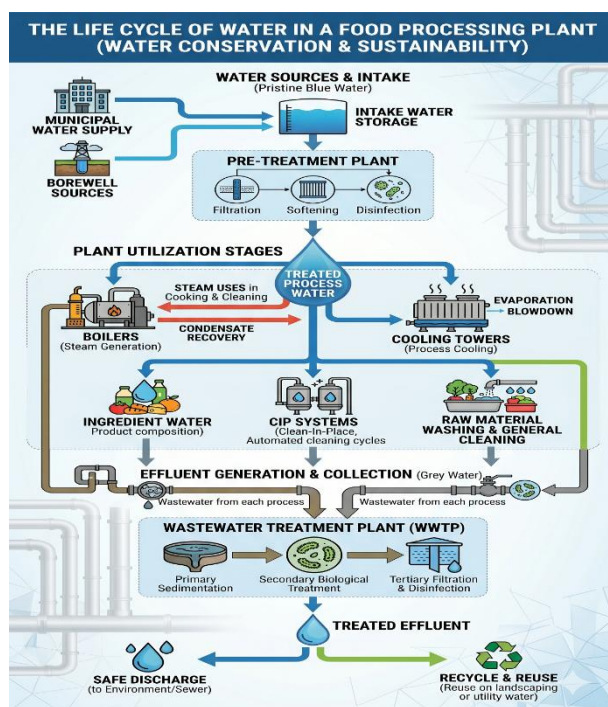

## Materials And Methods

To ensure a robust, objective, and scientifically rigorous analysis, this research employs a multi-tiered methodological approach. The study synthesizes diverse streams of secondary data, established environmental engineering assessment frameworks, thermodynamic process evaluations, and governmental regulatory policy analysis. The design is explicitly structured to move seamlessly from macro-level national water accounting to the micro-level realities of factory compliance and technological implementation.

## 2.1 Study Design and Data Synthesis

This report is fundamentally grounded in a comprehensive systematic review of environmental databases, government policy documents, industrial corporate sustainability reports, and peer-reviewed scientific literature published primarily between the years 2020 and 2025. Data pertaining to national water availability, agricultural water utilization, and state-level infrastructure compliance were extracted from the NITI Aayog Composite Water Management Index (CWMI) and periodic reports from the Ministry of Jal Shakti. Sub-sector specific production volumes and corresponding water usage metrics were derived from Ministry of Agriculture statistics, the Department of Animal Husbandry and Dairying (DAHD), and industry association green papers, such as those published by the Institution of Chemical Engineers (ICChemE).

## 2.2 Water Footprint Assessment (WFA) Framework

To analyze the specific water consumption metrics of distinct food commodities, the study rigorously utilizes the Water Footprint Assessment (WFA) methodology pioneered by the Water Footprint Network. This methodology allows for the precise disaggregation of water use into blue, green, and grey components, facilitating a nuanced understanding of where specific pressures are applied within the supply chain. For factory-level evaluations, the study relies on the principles outlined in the ISO 14046 standard for environmental management and the AWWA/IWA (American Water Works Association/International Water Association) Water Audit Methodology. This comprehensive accounting framework maps the facility-wide water balance. It systematically categorizes volumetric flow into strict definitions:

- **System Input Volume:** The total water introduced into the facility, comprising volume from owned sources (e.g., internal borewells) and imported water (e.g., purchased bulk municipal water).
- **Authorized Consumption:** The volume of water knowingly and necessarily used for production, domestic administration, and essential utility operations.
- **Water Losses:** The critical metric divided into Apparent Losses (inaccuracies due to metering errors or unauthorized usage) and Real Losses (physical leakages from pressurized mains, failing valves, or gross inefficiencies in process engineering).

- 

## 2.3 Water Quality Assessment Indices

To empirically demonstrate the severe ecological impact of unchecked industrial effluent discharge, the report incorporates high-resolution data from an extensive three-year hydro-chemical study (spanning 2022 to 2025) of the Brahmani River in Rourkela, Odisha. This industrial region, dominated by metallurgical, paper, and food processing facilities, serves as a prime indicator of systemic surface water degradation. The severity of the river's water degradation is mathematically quantified using five distinct, internationally recognized Water Quality Indices (WQI). These models aggregate complex arrays of physicochemical parameters (including pH, electrical conductivity, total dissolved solids, biological oxygen demand, and specific heavy metal concentrations) into singular, objective scores:

1. **British Columbia WQI (BCWQI):** Evaluates the scope, frequency, and amplitude of parameter deviations from standard guidelines.
2. **Canadian WQI (CWQI):** A similar variance-based model heavily utilized in Commonwealth environmental assessments.
3. **Assigned WQI (AWQI):** Utilizes weighted parameters based on their specific relevance to human health and agricultural toxicity.
4. **Malaysian WQI (MWQI) & Oregon WQI (OWQI):** Employed to underscore complex interactions among pollutants and track temporal variations across monsoon and pre-monsoon seasons.

## 2.4 Regulatory Framework Evaluation

The assessment of industrial accountability and compliance is firmly anchored in the statutory guidelines established by the Government of India. The Central Pollution Control Board (CPCB) standards, formulated under the Water (Prevention and Control of Pollution) Act of 1974 and the Environment (Protection) Act of 1986, were scrutinized to establish the maximum permissible limits for industrial effluent discharge across various sub-categories (e.g., soft drinks, fruit processing, bakeries).

Concurrently, the Central Ground Water Authority (CGWA) guidelines were analyzed to delineate the legal boundaries and regulatory mechanisms governing groundwater extraction. This includes the evaluation of No Objection Certificate (NOC) prerequisites, the mandatory construction of piezometer monitoring wells, telemetry system implementations, and the specific exemptions granted to micro and small enterprises drawing less than 10 cubic meters per day (10 KLD).

## 2.5 Technological and Economic Evaluation Models

To critically evaluate the proposed technological solutions for water conservation, the report applies the fundamental 4R operational principle—Reduce, Reuse, Recycle, and Recover—as the diagnostic baseline for assessing wastewater treatment plants.

The analysis deeply investigates the thermodynamic and mechanical separation processes inherent in Zero Liquid Discharge (ZLD) systems. These systems typically employ a multi-stage process involving primary physicochemical coagulation, secondary aerobic/anaerobic biological degradation (e.g., UASB reactors), tertiary ultrafiltration, high-recovery Reverse Osmosis (RO), and terminal Mechanical Vapor Recompression (MVR) or

multi-effect thermal evaporators and crystallizers. Furthermore, the methodology integrates the assessment of Greenhouse Gas (GHG) emissions linked to the energy requirements of these advanced water pumping and treatment facilities, ensuring a holistic understanding of the environmental trade-offs between water recovery and carbon footprint expansion.

## Results

**3.1 Baseline Water Footprints in the Food Processing Sector:** The transformation of raw agricultural commodities into refined, safe, and shelf-stable food products demands an exceptionally high volume of freshwater. The systematic analysis of specific water consumption metrics reveals that the Indian food industry operates with a massive blue water footprint, placing intense and continuous pressure on regional aquifers, particularly in heavily industrialized states like Punjab, Maharashtra, and Uttar Pradesh.

The meat and poultry processing sectors emerge as particularly resource-intensive operations. Producing a single kilogram of processed chicken meat in India requires an aggregate of approximately 4,300 litres of water. While a vast majority of this total represents the green water embedded in the cultivation of the 120 grams of daily feed the broiler consumes, the factory-level slaughtering, defeathering, evisceration, and chilling stages still aggressively consume 5 to 6 litres of pure blue water per bird. When scaled to national production levels—India produced over 5.2 million tonnes of chicken meat in 2024—the aggregate industrial water withdrawal dedicated solely to poultry processing is staggering. For larger livestock, the water demand escalates drastically; the holistic production of sheep meat requires roughly 10,000 litres of water per kilogram, while buffalo meat demands upward of 15,000 litres per kilogram. Given the 2024 production figures of 1.113 million tonnes of sheep meat and 2.1 million tonnes of buffalo meat, the sheer volume of water channelled through these supply chains is immense.

The dairy industry presents another highly critical area of intense localized water consumption. The global average water footprint for milk production stands at 1,020 litres per kilogram; however, India's footprint is notably less efficient, recorded at 1,078 litres per kilogram, trailing behind global leaders like the Netherlands (528 L/kg) and the USA (796 L/kg). At the factory level, the direct processing of one litre of raw milk consumes between 1 to 5 litres of blue water. A detailed operational evaluation of a standard Indian dairy factory producing 120,000 litres of milk per day illustrates the extreme localized water stress inherent in dairy engineering. Within the plant, water is utilized in highly specific, large-volume ratios directly dependent on the thermodynamic requirements of the processing stage. For instance, the critical blast cooling operations function on a 5:1 milk-to-water ratio, requiring 24,000 litres daily. Conversely, the heating and pasteurization stages operate on an intensive 1:2 ratio, meaning the heating stage alone can consume an astounding 240,000 litres of water daily in a single medium-sized facility. In the state of Punjab alone, a study assessing nine dairy processing plants revealed a direct combined blue water footprint of 1.54 Million Cubic Meters (MCM) per year, contributing significantly to the unsustainable withdrawal and rapid drying of regional aquifers.

### 3.2 Surface Water Degradation: Evidence from River Basins

When food factories and allied industrial facilities fail to implement or maintain adequate Effluent Treatment Plants (ETP), the resulting grey water footprint devastates local ecosystems. The extensive three-year study of the Brahmani River in Rourkela, Odisha, serves as a profound empirical example of industrial water mismanagement and its catastrophic downstream effects. Rourkela, popularly known as the "steel city" and experiencing a rapid 20% decadal population growth rate, suffers from severely inadequate municipal sewage infrastructure combined with heavy, uncontrolled industrial discharge from metallurgical plants, paper mills, tanneries, and food processing units.

The water quality of the Brahmani River is heavily compromised, with degradation becoming acutely pronounced during the pre-monsoon dry season when the river's natural dilution capacity is at its lowest and industrial effluent concentration peaks. Physicochemical analyses reveal that the river water ranges from slightly acidic to alkaline, with pH levels fluctuating between 5.33 and 7.06. Crucially, the river exhibits severe heavy metal contamination, with concentrations of Lead  $Pb^2$  Copper  $Cu^2$  and Zinc  $Zn^2$  consistently exceeding the safe national standards established for potable water and ecological health.

The application of multiple Water Quality Indices mathematically confirms the severity of the ecological collapse:

- **British Columbia WQI (BCWQI):** Scores ranged dramatically from 2 to 95, with an average score of 52.80, categorizing the water as "Borderline." Most alarmingly, only 20% of the sampled sites across the river basin were deemed suitable for human drinking purposes, with multiple locations recording massive exceedances in Electrical Conductivity (EC), Total Dissolved Solids (TDS), alkalinity, and hardness.
- **Canadian WQI (CWQI):** Scores ranged from 27 to 98, effectively classifying 60% of the water samples in the "Marginal" to "Poor" categories.
- **Assigned WQI (AWQI):** Scores spanned from 36 to 345. Approximately 40% of the tested sites were classified as entirely "Unsuitable" for both domestic and agricultural use, driven by dangerously elevated TDS and trace element mobilization. Only 20% of the samples managed to fall within the "Excellent" to "Good" categories.

- **Malaysian WQI (MWQI) & Oregon WQI (OWQI):** The OWQI specifically highlighted that 40% of the samples were "Poor" to "Very Poor," capturing the deadly mobilization of heavy metals and the toxic adverse impacts of monsoonal infiltration carrying agrochemical runoff into the river.

These heavy metals enter the river system via both natural geogenic weathering and aggressive anthropogenic industrial origins. The persistence of  $Pb^2$  and  $Zn^2$  the aquatic environment links directly back to untreated factory discharges. The long-term toxicological risks of this grey water footprint are severe; downstream agricultural and residential communities face heightened risks of carcinogenicity (linked to Lead exposure), nephrotoxicity, and neurotoxicity (linked to Copper and Zinc accumulations).

Similarly devastating practices are observed in other industrial clusters. For instance, paper mills and agro-processing facilities near Muzaffarnagar on the Hindon River frequently bypass rudimentary treatment systems, discharging chlorine-bleached, high-COD wastewater directly into roadside irrigation canals. Local farmers, lacking alternative freshwater sources due to systemic aquifer depletion, are forced into a dangerous reliance on this toxic industrial effluent to irrigate their crops.

### 3.3 Regulatory Compliance and Effluent Standards

To legally combat this catastrophic level of industrial pollution, the Central Pollution Control Board (CPCB) has established a robust framework of strict effluent discharge limits targeted specifically at the food processing industry. The guidelines are scientifically formulated to enforce mandatory upper limits on Biochemical Oxygen Demand (BOD), Suspended Solids (SS), Oil and Grease, and pH levels before wastewater can be legally released into the natural environment or municipal septic networks.

**Table 1** meticulously outlines the specific CPCB effluent limits mandated for various sub-sectors within the food and beverage industry:

Industry Category	Production Scale / Type	Permissible pH	Suspended Solids (mg/L)	Oil & Grease (mg/L)	BOD (3-days at 27°C) (mg/L)
Soft Drinks	>0.4 MT/day (Fruit/Synthetic)	6.5–8.5	100	10	30
Soft Drinks	<0.4 MT/day (Synthetic)	6.5–8.5	50	10	30
Fruits & Vegetables	>0.4 MT/day	6.5–8.5	50	10	30
Fruits & Vegetables	0.1–0.4 MT/day	6.5–8.5	50	10	30
Bakery	Bread & Biscuit manufacturing	6.5	Not Specified	Not Specified	200

**Data Source: Compiled from Central Pollution Control Board (CPCB) Guidelines for Effluent Treatment Plants in Food and Beverage Industries. All concentrations must not exceed the stated mg/L, except for the pH range.**

Furthermore, the CPCB enforces a rigorous color-coding categorization system to classify industries based on their inherent pollution potential. While highly toxic sectors like petrochemicals and distilleries are coded "Red," the vast majority of food processing industries—including fruit and vegetable processing—fall under the "Orange" category, signifying moderate to high pollution potential that necessitates mandatory Consent to Establish (CTE) and Consent to Operate (CTO) clearances from State Pollution Control Boards (SPCBs). Heavy

metal limits are also strictly capped to prevent the kind of toxicity observed in the Brahmani River; for instance, allowable limits dictate Lead (**Pb**) < 0.1 ppm, Copper (**Cu**) < 0.01 ppm, Zinc (**Zn**) < 0.1 ppm, and Mercury (**Hg**) < 0.004 ppm.

In tandem with effluent regulations, the volumetric extraction of groundwater is closely monitored by the Central Ground Water Authority (CGWA). Under the most recent 2024 guidelines, industries drawing less than 10 cubic meters (10,000 litres) of groundwater per day are officially classified as Micro and Small Enterprises. Crucially, these smaller units receive a lifetime exemption from obtaining a CGWA No Objection Certificate (NOC), requiring only a self-declaration submitted via the BhuNeer Portal. However, medium to large-scale facilities extracting more than 100 cubic meters of groundwater daily are subjected to rigorous oversight. They are legally mandated to conduct certified industrial water audits biannually, construct piezometer monitoring wells, and install high-quality, BIS-standard digital telemetry flow meters to provide continuous extraction data directly to the regulatory authorities.

### 3.4 Interventions: Water Audits and Process Optimization

In direct response to these tightening regulatory frameworks, escalating freshwater acquisition costs, and the intrinsic operational risks of water scarcity, leading Indian food factories are rapidly adopting comprehensive Water Audits.

The certified industrial water audit serves as the fundamental diagnostic foundation for any viable conservation strategy. Adhering strictly to the ISO 14046 standard and the AWWA/IWA methodology, the audit involves a meticulous, multi-week investigative process.

- **Phase 1 (Preliminary Survey):** Engineers gather historical utility bills and establish baseline details of water sources and distribution matrices.
- **Phase 2 (Measurement):** Quantitative flow meters are installed across intake points, cooling towers, and discharge outlets to capture variations across complex production cycles, formulating a precise facility-wide water balance.
- **Phase 3 (Technical Analysis):** Utilizing ultrasonic sensors and pressure tests, engineers categorize water discrepancies into "apparent losses" (metering errors) and "real losses" (physical leaks or inefficient, continuous-flow CIP protocols).


The results derived from these audits are consistently transformative. According to data compiled from over 200 industrial audits by leading institutional bodies, tailored sector-focused water management programs allow industrial facilities to reduce their total freshwater consumption by an impressive 25% to 45%. Specifically, low-cost intervention strategies (such as fixing leaks and optimizing nozzle sizes) yield 15% to 20% water savings with an incredibly short financial payback period of just 4 to 5 months. Medium-cost strategies yield 30% to 40% savings with a payback of 12 to 18 months, while aggressive wastewater recycling strategies can yield up to 50% total water savings.

**3.5 Zero Liquid Discharge (ZLD) Implementations and Resource Recovery:** While audits minimize the blue water input, Zero Liquid Discharge (ZLD) technologies completely eliminate the grey water output, representing the absolute pinnacle of sustainable industrial water management. A fully implemented ZLD system is an advanced wastewater treatment matrix designed to recover and reuse 100% of the water utilized in manufacturing, leaving absolutely zero liquid effluent discharge.

The technological progression of a ZLD plant typically involves initial physicochemical treatments to remove suspended solids, followed by biological degradation (utilizing technologies like UASB reactors) to handle the massive BOD and COD loads typical of food waste. The clarified water then passes through ultrafiltration and high-recovery Reverse Osmosis (RO) membranes. The final, highly concentrated brine stream is subjected to thermal evaporation and crystallization. The pristine, high-purity water recovered from this process is looped directly back into the factory's cooling towers or high-pressure boiler systems, effectively severing the plant's reliance on external freshwater sources for those specific, high-volume processes. The remaining dry solids—comprising salts and organic sludge—are separated for safe landfill disposal or, increasingly, by product valorization.

Driven by stringent environmental compliance mandates and the physical realities of water scarcity, the Indian ZLD market is experiencing exponential growth. Market projections indicate an expansion from USD 1.14 billion in 2024 to a massive USD 1.84 billion by 2030. While the textile and chemical industries currently dominate ZLD adoption, the Food and Beverage sector represents a rapidly growing 15% share of this market.

Real-world corporate implementations demonstrate the immense viability of these systems. For instance, COFCO International implemented a closed-loop ZLD system at their Kandla refinery in India. Treating 150,000 to 180,000 litres of wastewater daily, the 2024 operationalization of their zero liquid discharge plant completely eliminated their effluent footprint while supporting their global water intensity reduction goals. Similarly, within the sugar processing sector, the installation of vinasse concentrators allows mills to extract and reuse water directly from sugarcane by-products. This not only lowers the volume of fresh blue water withdrawn but retains concentrated nutrients within the vinasse, which can be utilized for agricultural fertilization, concurrently reducing the greenhouse gas emissions previously associated with transporting massive volumes of unconcentrated liquid waste to fields.

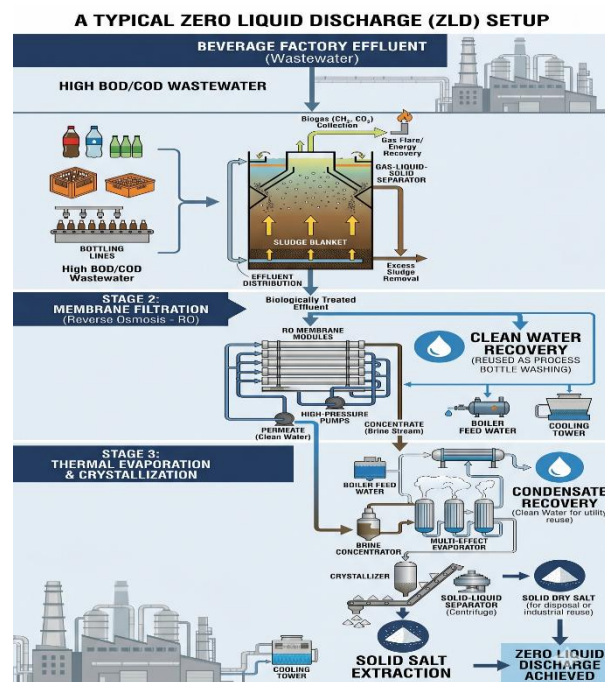

## Discussions

The empirical data, rigorous hydro-chemical analyses, and regulatory reviews presented here underscore a profound paradox within India's food processing sector: an industry totally dependent on pristine freshwater is actively contributing to the destruction of its own resource base. These findings reveal a complex matrix of technological, economic, regulatory, and public health implications that must be urgently addressed to secure a sustainable future.

**4.1 Interpreting the True Cost of Water in Food Factories:** The staggering volumetric data surrounding blue water consumption—such as the 240,000 litres utilized daily merely for the heating stage of a single mid-sized dairy plant, or the 4,300 litres required per kilogram of processed poultry—highlights entrenched operational inefficiencies. In many conventional Indian food factories, water is traditionally treated as an infinite, heavily subsidized utility rather than a highly valuable raw material. The continued reliance on single-pass cooling systems, inefficient boiler blowdown protocols, and outdated manual cleaning procedures directly results in excessive blue water withdrawal.

However, the most insidious threat lies in the "grey water footprint," a metric frequently ignored by operators and policymakers alike. The true environmental cost of a food factory is not measured merely by the water it pumps out, but by the exponentially larger volume of natural water required to physically dilute its poorly treated effluents back to safe ambient standards. When industrial clusters continuously discharge heavy metals, toxic bleach, and high-BOD organic matter into watersheds, they effectively "steal" clean water downstream. This systemic pollution deprives municipalities of safe drinking water and forces agricultural communities to rely on toxic wastewater for crop irrigation.


The severe toxicological risks identified in the Brahmani River study—where 80% of the water is unfit for consumption—demonstrate unequivocally that industrial water mismanagement is a critical public health crisis.

**4.2 The Economics, Energy Trade-offs, and Operational Resilience of ZLD:** The transition toward circular Zero Liquid Discharge (ZLD) systems frequently faces stiff financial resistance from facility owners due to the substantial initial Capital Expenditure (CAPEX) required for advanced membrane bioreactors, reverse osmosis units, and thermal crystallizers. However, the economic narrative is shifting rapidly, as evidenced by the projected 60% growth in the Indian ZLD market by 2030. Forward-thinking enterprises recognize that ZLD is a vital strategic asset in an era of acute water scarcity. By recovering up to 98% of the solvent water for immediate reuse, ZLD drastically lowers the Operational Expenditure (OPEX) associated with purchasing municipal water, running deep-well pumps, and paying state discharge surcharges. Comprehensive audits show that optimizing stream separation—specifically isolating low-volume, highly concentrated organic process water from general wash water—can reduce monthly discharge costs by up to 30%, rapidly accelerating the ROI.

Furthermore, the operational resilience provided by ZLD is invaluable. In regions facing chronic, climate-induced drought and severe groundwater depletion, ZLD ensures unbroken production continuity. A factory continuously recycling its internal water inventory becomes functionally immune to municipal rationing or seasonal aquifer drops.

Nevertheless, it is critical to acknowledge ZLD's thermodynamic trade-offs. The advanced pumping, membrane filtration, and thermal evaporation stages are highly energy-intensive. Achieving high water efficiency often comes at the direct cost of decreased energy efficiency. To achieve true sustainability, ZLD implementation must be tightly coupled with renewable energy sources and advanced heat-recovery systems.

**4.3 Comparative Analysis with Recent Literature and Global Standards:** Comparing current Indian practices against recent international literature (2020–2025) reveals a stark contrast in industrial ambition. For instance, the UK Food and Drink Federation successfully achieved a 16% reduction in water usage, saving 6.1 million cubic meters of water, demonstrating that massive, industry-wide conservation is feasible through shared best practices. Similarly, literature analyzing the EU's food consumption water footprint utilizes highly advanced, scarcity-weighted AWARE models, assessing the "full supply chain" impact. If Indian regulatory bodies adopted these models, regulatory pressure on factories operating in designated "Over-exploited" areas—where new groundwater structures are strictly prohibited—would increase exponentially, forcing immediate technological compliance.

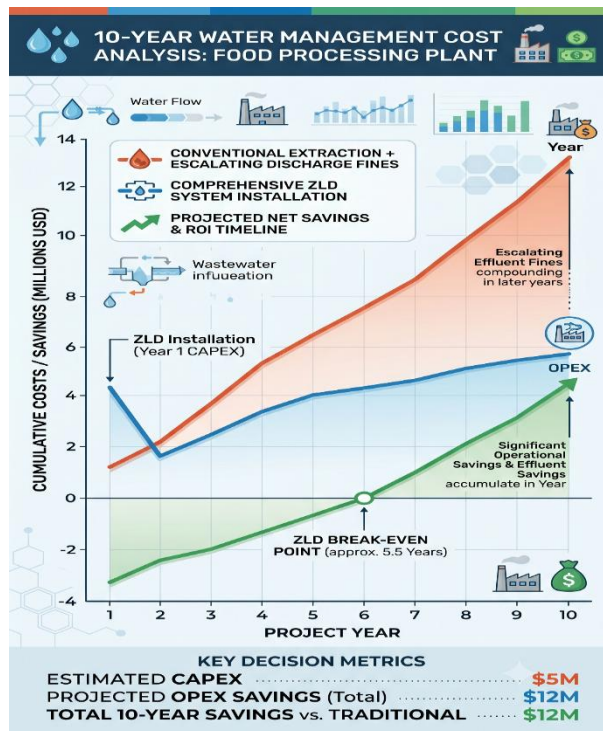

**4.4 Regulatory Loopholes, Policy Implications, and the SDGs:** A critical analysis of the current Indian regulatory environment reveals a disturbing chasm between governmental intent and ground-level execution. The Ministry of Jal Shakti has strongly advocated for the reuse of industrial wastewater, explicitly aligning with UN SDG 6 and SDG 12.3. However, the NITI Aayog Composite Water Management Index reports that 16 Indian states continue to perform abysmally in holistic water management, and the central mandate to achieve 20% wastewater reuse remains severely unimplemented.

A major contributing factor to this systemic failure is the presence of cavernous regulatory loopholes within CGWA guidelines. The specific exemption allowing Micro and Small Enterprises to extract up to 10 KLD of groundwater without obtaining a No Objection Certificate or installing mandatory telemetry creates a massive blind spot in national water accounting.

Because the Indian food sector is highly fragmented, this cumulative, unmetered extraction drastically accelerates localized aquifer depletion. Without strict oversight and universal metering, the government's mandate for industries to reduce groundwater use by 20% following an audit remains mathematically impossible to enforce. Furthermore, enforcement mechanisms rely too heavily on sporadic, manual inspections by underfunded State Pollution Control Boards (SPCBs). To prevent catastrophic river pollution, it is essential to mandate the integration of continuous, IoT-enabled real-time effluent monitoring systems on all factory discharge pipes.

**4.5 Implications for Public Health and Export Markets:** The failure to properly manage industrial water poses a direct threat to India's agricultural export economy. Global consumers and regulatory bodies are increasingly savvy regarding supply chain sustainability. Leading publications in the UAE—a massive importer of Indian foods—have explicitly warned that the persistent failure to meet international water quality standards and the risks of irrigating crops with untreated wastewater threaten the viability of Indian agricultural exports. As global markets impose stricter ESG compliance frameworks, factories operating with high water footprints will find themselves locked out of lucrative supply chains.

**4.6 Acknowledgment of Study Limitations:** While this research provides a comprehensive overview of water management within Indian food factories, certain methodological limitations exist. The reliance on synthesized secondary data models means that highly localized variances in factory operations and state-level dynamics may be underrepresented. The Water Quality Indices applied to the Brahmani River provide a robust snapshot of regional impact; however, without isotopic tracing, isolating the precise pollutant contribution of a single food

factory versus an adjacent metallurgical plant remains complex. Finally, economic cost-benefit analyses for ZLD systems remain vulnerable to fluctuations in local energy grid prices.

## Conclusion

### 5.1 Summary of Key Findings

The Indian food processing industry currently stands at a highly critical operational, ecological, and economic crossroads. As the subcontinent grapples with rapidly depleting aquifers, highly erratic monsoon patterns driven by global climate change, and the nutritional demands of an ever-expanding population of 1.4 billion people, the archaic, linear industrial model of unlimited freshwater extraction and unmitigated toxic effluent discharge is unequivocally obsolete. This comprehensive research demonstrates that vital sub-sectors—particularly dairy, meat, and beverage processing—consume vast, unsustainable quantities of blue water. Simultaneously, they contribute massively to the irreversible degradation of essential surface water networks, as vividly illustrated by the severe heavy metal and physicochemical contamination of the Brahmani River basin in Odisha.

### 5.2 Practical Implications for Indian Food Factories

The pathway to industrial sustainability and ecological balance is both technologically viable and, over the medium term, economically highly advantageous. The rigorous implementation of certified, ISO 14046 compliant water audits, guided fundamentally by the 4R principles, equips factory management with the precise diagnostic data necessary to eliminate gross inefficiencies, plug physical leaks, and optimize thermodynamic processes. These relatively low-cost interventions consistently yield freshwater savings of 25% to 45% with remarkably short financial payback periods. Furthermore, the aggressive, industry-wide adoption of Zero Liquid Discharge (ZLD) systems possesses the transformative potential to convert hazardous, high-BOD wastewater from a severe environmental liability into a renewable, internally controlled operational resource, rendering factories resilient against external water scarcity.

### 5.3 Directions for Future Research

To secure India's future food and water security, legislative and scientific paradigms must shift simultaneously. Policymakers must urgently close existing regulatory loopholes—most notably the unmetered groundwater extraction allowances granted to micro and small enterprises—and strictly enforce CPCB effluent limits through mandatory, real-time digital IoT monitoring. Future academic and engineering research must prioritize the development of novel, low-energy membrane technologies and renewable thermal energy integration to drastically reduce the capital and operational carbon costs of ZLD systems. Making circular water management technologically accessible and economically viable for food factories of all scales is no longer merely a matter of regulatory compliance; it is the fundamental, non-negotiable prerequisite for the continued economic survival and public health of the nation.

## Bibliography

In this article, the bibliography refers to a comprehensive source of books, journals, periodicals and different websites consulted and cited by the author but the author not directly copied from the author regarding content, diagrams, facts and findings to the related article. Thus, we the authors, solemnly declare that this is our own creativity with maintaining originality. Some extent we may refer previous publications cited it in the literature review section with due permission of previous authors.

### Key aspects of Bibliography:

**Purpose:** This article / research paper supports the academic integrity of the research scholars and professors, and helps to authors for their citations located and develop the motivation of readers for their happiness.

**Content:** The content of article is maintaining author identification, names, title, publication, Date of Indexing (DOI), Ordering. The article maintaining proper format and order of IEEE Template guidelines i.e. Title- 20 pt, Abstract: 10 pt, Heading: 12pt, Body: 10 pt

**Acknowledgments:** The comprehensive synthesis of this research report was made possible through the robust environmental data frameworks provided by the Central Pollution Control Board (CPCB), the Central Ground Water Authority (CGWA), the NITI Aayog Composite Water Management Index, and the invaluable empirical river basin studies conducted by dedicated environmental engineering researchers and hydrologists across India.

**Funding Statement:** This research report received no specific grant from any funding agency in the public, commercial, or not-for-profit sectors. The analysis, data synthesis, and manuscript preparation were conducted as an independent, self-funded academic inquiry into sustainable industrial engineering practices and environmental policy.

**Conflict of Interest Disclosure:** The authors declare that there are no known competing financial interests, commercial affiliations, or personal relationships that could have appeared to influence, bias, or alter the objective findings and analyses reported in this paper.

**Data Availability Statement:** All statistical data, regulatory frameworks, and empirical measurements utilized in the formulation of this report are derived entirely from publicly accessible government documents, environmental policy guidelines, and published, peer-reviewed open-access literature. Specific regulatory metrics regarding CPCB effluent guidelines, CGWA groundwater compliance regulations, and national water footprint statistics can be directly accessed via the respective official Indian governmental and institutional portals.

## References

1. L. Garcia Herrero, D. Gibin, M. Damiani, E. Sanye Mengual, and S. Sala, "What is the water footprint of EU Food consumption A comparison of water footprint assessment methods," *Journal of Cleaner Production*, vol. 415, p. 137807, 2023, doi: 10.1016/j.jclepro.2023.137807.
2. K. Valta, T. Kosanovic, D. Malamis, K. Moustakas, and M. Loizidou, "Overview of water usage and wastewater management in the food and beverage industry," *Desalination and Water Treatment*, vol. 53, no. 12, pp. 3335–3347, 2015, doi: 10.1080/19443994.2014.934100.
3. C. Lopes, L. T. Antelo, A. Franco-Uría, A. A. Alonso, and R. Pérez-Martín, "Chitin production from crustacean biomass: Sustainability assessment of chemical and enzymatic processes," *Journal of Cleaner Production*, vol. 172, pp. 4140–4151, 2018, doi: 10.1016/j.jclepro.2017.01.082.
4. Y. Li, L. Lu, Y. Tan, L. Wang, and M. Shen, "Decoupling Water Consumption and Environmental Impact on Textile Industry by Using Water Footprint Method: A Case Study in China," *Water*, vol. 9, no. 2, p. 124, 2017, doi: 10.3390/w9020124.
5. L. Zhuo, M. M. Mekonnen, and A. Y. Hoekstra, "The effect of inter-annual variability of consumption, production, trade and climate on crop-related green and blue water footprints and inter-regional virtual water trade: A study for China (1978–2008)," *Water Research*, vol. 94, pp. 73–85, 2016, doi: 10.1016/j.watres.2016.02.037.
6. Y. Tian, M. Ruth, and D. Zhu, "Using the IPAT identity and decoupling analysis to estimate water footprint variations for five major food crops in China from 1978 to 2010," *Environment, Development and Sustainability*, vol. 19, no. 6, pp. 2355–2375, 2017, doi: 10.1007/s10668-016-9860-1.
7. Y. Cai, W. Yue, L. Xu, Z. Yang, and Q. Rong, "Sustainable urban water resources management considering life-cycle environmental impacts of water utilization under uncertainty," *Resources, Conservation and Recycling*, vol. 108, pp. 21–40, 2016, doi: 10.1016/j.resconrec.2016.01.008.
8. B. D. Coday et al., "The sweet spot of forward osmosis: treatment of produced water, drilling wastewater, and other complex and difficult liquid streams," *Desalination*, vol. 333, no. 1, pp. 23–35, 2014, doi: 10.1016/j.desal.2013.11.014.
9. G. G. Simons, W. W. Bastiaanssen, and W. W. Immerzeel, "Water reuse in river basins with multiple users: a literature review," *Journal of Hydrology*, vol. 522, pp. 558–571, 2015, doi: 10.1016/j.jhydrol.2015.01.016.
10. C. N. Ong, "Water reuse, emerging contaminants and public health: state-of-the-art analysis," *International Journal of Water Resources Development*, vol. 32, no. 4, pp. 514–525, 2016, doi: 10.1080/07900627.2015.1096765.
11. R. B. Panda and A. A. Karim, "Assessment of Water Quality of Subarnarekha River in Balasore Region, Odisha, India," *Current World Environment*, vol. 9, no. 2, pp. 437–446, 2014, doi: 10.12691/ajwr-6-2-4.
12. J. Struk-Sokolowska and J. Tkaczuk, "Analysis of bakery sewage treatment process options based on COD fraction changes," *Journal of Ecological Engineering*, vol. 19, pp. 226–235, 2018.
13. M. A. Abdel-Fatah, H. O. Sherif, and S. I. Hawash, "Design parameters for waste effluent treatment unit from beverages production," *Ain Shams Engineering Journal*, vol. 8, pp. 305–310, 2017.
14. A. Amann et al., "Environmental impacts of phosphorus recovery from municipal wastewater," *Resources, Conservation and Recycling*, vol. 130, pp. 127–139, 2018.
15. D. Nayyar, T. Nawaz, S. Noore, and A. P. Singh, "Food Processing Wastewater Treatment: Current Practices and Future Challenges," in *Pollution Control Technologies*, Singapore: Springer, 2021.
16. A. Kant, "Composite Water Management Index," NITI Aayog, 2018. [Online]. Available: <https://www.niti.gov.in/sites/default/files/2023-03/CompositeWaterManagementIndex-CWMI.pdf>.
17. S. Jain, "Notification Number 3289(E) - Declaration to be submitted by food business operators extracting ground water," Food Safety and Standards Authority of India (FSSAI), 2021. [Online]. Available: [https://foscos.fssai.gov.in/assets/docs/CGWA\\_NOC\\_dated\\_11.01.2021.pdf](https://foscos.fssai.gov.in/assets/docs/CGWA_NOC_dated_11.01.2021.pdf).
18. "What is a Water Audit in India? Process, Benefits, and Importance for Industry," Chola MS Risk Services. [Online]. Available: <https://cholarisk.com/blog/what-is-a-water-audit-process-benefits-and-importance-for-indian-industry/>.